

TruckLink

Broadcast fibre optic link for Studio and OB applications

TruckLink, a portable mussel shell enclosure for field use, houses the Telecast T-POV 324 and up to 4 HD-SDI links breaking out all the signals of the T-POV to BNCs, XLRs and 9-pin D to the front panel.

The system transports up to 6 SD/HD-SDI videos, bi-directional composite video, bi-directional 4 analogue audios, 4x serial data, 10/100MB Ethernet and 2x GPI over 2 cores of singlemode fibre.



TruckLink can be supplied with industry standard optical fibre connectors including Neutrik DUO or QUAD, LEMO 3K.93C, ST and Delphi 4CH hermaphroditic. Each unit has diagnostic LEDs and optical power metering for first line maintenance. Trucklink can be deployed in pairs or can connect to the 1U 19" rack mount base station

APPLICATIONS

Television Broadcast

- Sport
- News
- SNG
- Studio floor box


Links between in field positions and OB Van

OPTIONS

- Battery Power, V Lock, PAG or Anton Bauer
- Backup battery
- Compatible with MiB StudioLink & Telecast T-POV 324
- Power over SMPTE cable
- Choice of fibre connector, Neutrik DUO or QUAD, Lemo 3K.93C, Delphi

EXPANSIONS

- Up to 4 extra 3G HD-SDI

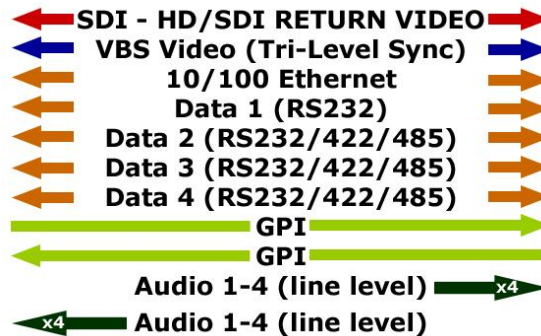

The basic TruckLink facilities are shown with HD-SDI each way. In addition up to 4 Fibre4TV 3G HD-SDI MiniLinks can be fitted providing 4 extra user configurable HD-SDIs making a total of 6



TRUCKLINK PORTABLE UNIT



TRUCKLINK BASE-STATION